

SERIES OF FIREPLACES

ZIBI



PRICES ZIBI



ZIBI/PF

PRICE FOR YOU



ZIBI/DECO

PRICE FOR YOU



ZIBI/L/BS
ZIBI/P/BS

PRICE FOR YOU



ZIBI/L/BS/DECO
ZIBI/P/BS/DECO

PRICE FOR YOU



ZIBI/G

PRICE FOR YOU

ADVANTAGES ZIBI

- MODERN DESIGN

The insert has singular decorative glass thanks to that it looks elegant and modern. Such solution visually enlarges the front of the insert and emphasizes the view of the fire. The door of the insert has comfortable handle.

- MAXIMUM USE OF ENERGY

More efficient combustion and longer maintenance of temperature by lining the combustion chamber with ceramic material TERMOTEC which accumulates heat and raises the temperature in the furnace.

Full combustion on the dust thanks to two deflectors which extend the exhaust path. This process increases the efficiency of burning and guarantees better energy use. It also minimizes the emission of harmful substances to the atmosphere.

Air supply to the inserts comes only from outside thanks to the inbuilt air intake connector fi 125 mm. It is controlled by an adjustable throttle with one controller beneath the door. This solution excludes errors of improper use. The whole mechanism works very quietly and flawlessly.

In this insert there is double air system of combustion chamber. Primary air which enables setting a fire is supplied by a system of holes in the fence.

Additionally, this insert is equipped with Clea Galss System (air curtain), so the air is supplied directly to the glass through a system of channels located on the sides of the fireplace. In this way oxygen is supplied to the upper part of the combustion chamber, where happens post-combustion of gases produced while combustion of wood. At the same time it reduces harmful CO emissions to the atmosphere.

Such air system enables to control burning process very precisely. In addition, the maximum use of heat is due to the densely spaced radiators.

- ECOLOGICAL COMBUSTION

The unit meets the requirements of Ecodesign standards and the restrictions of the BImSchV 2 standard, which determines the maximum CO emission.

- SAFETY ON THE HIGHEST LEVEL

Front of the insert is equipped with a heat resistant ceramic withstanding temperatures up to 660°C. We offered by us glass certified quality and safety.

The body and the front of the insert is resistant to high temperatures through the use of high quality steel.

Excellent tightness thanks to the solid welding made in shielded noble gas. Steel elements are laser cut with the help of modern equipment, and then they are bent on CNC benders.

- COMFORTABLE USE

Non-grate insert offers so-called phenomenon of up burning of the ashes. In practice, this means that the burning fuel to a fine ash which is the minimum amount. Thus obtained thermal energy from wood is used up.

Reduced soot deposition through a system of clean glass system (air curtain). Air curtain separates the glass from the chamber thanks of that the glass doesn't become dirty and emit more heat to the room.

Insert can be easily elevate thanks to the regulated the legs.

The model is equipped with a movable exhaust outlet and thanks to that there is no need to purchase additional knees for installation. It is possible due to easy adjustment of the angle of connection to the chimney system.



ADVANTAGES ZIBI




ZIBI


| | |
|---|--------------------------------------|
| kW | 11,0 |
| <kW> | 4.5 - 14.0 |
|  | 180 |
|  | ~ 80,0% |
|  | 400 |
| CO | 0,1 % |
|  | 290,0 |
|  | - |
|  | steel, Termotec |
|  | seasonal hardwood (humidity max 20%) |




DIMENSIONS ZIBI

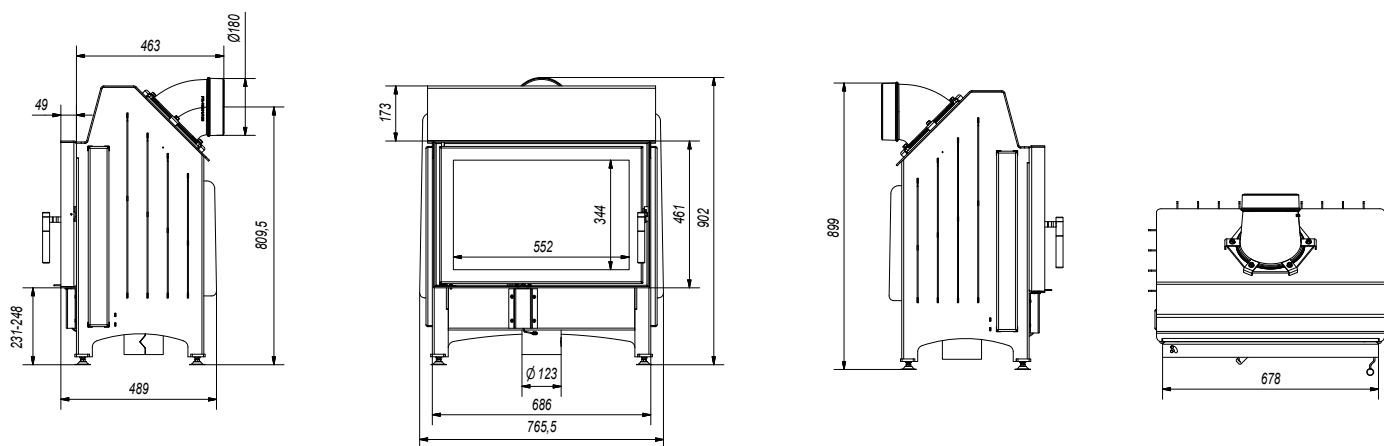


DIMENSIONS ZIBI DECO

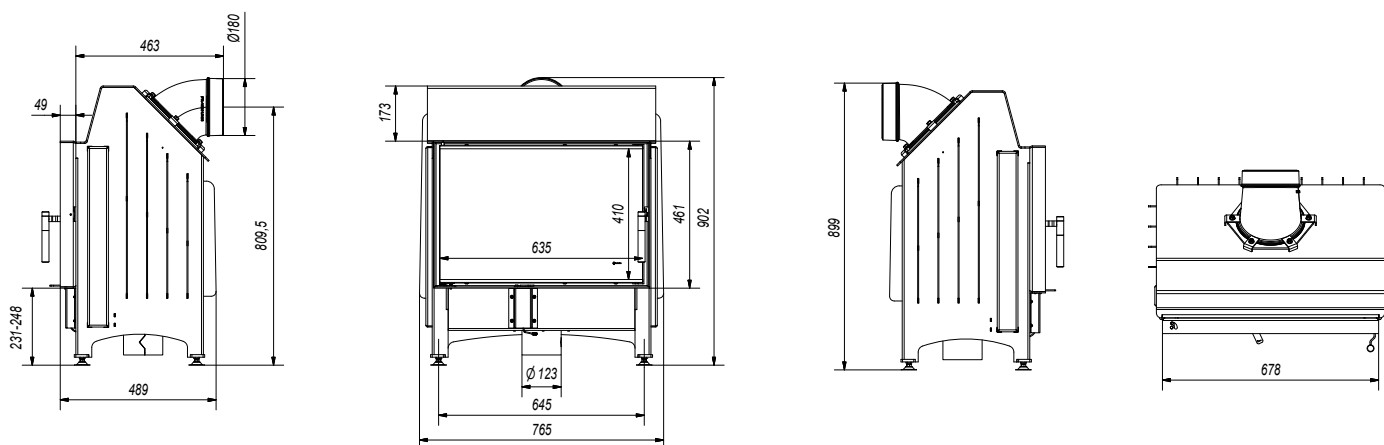

DIMENSIONS ZIBI L/P BS

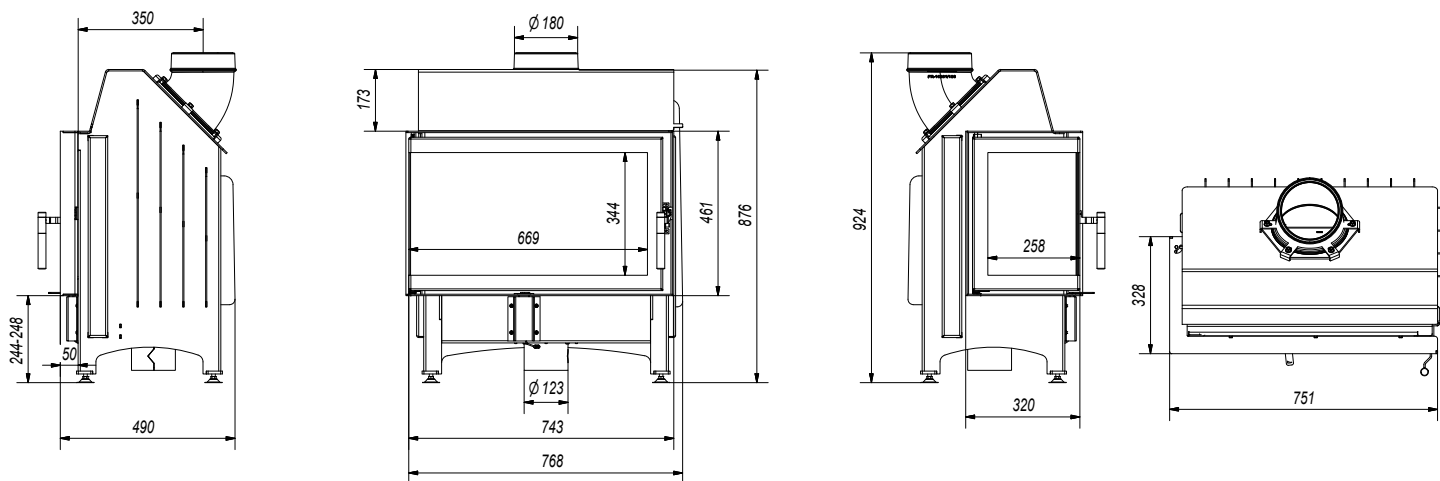

DIMENSIONS ZIBI L/P BS DECO

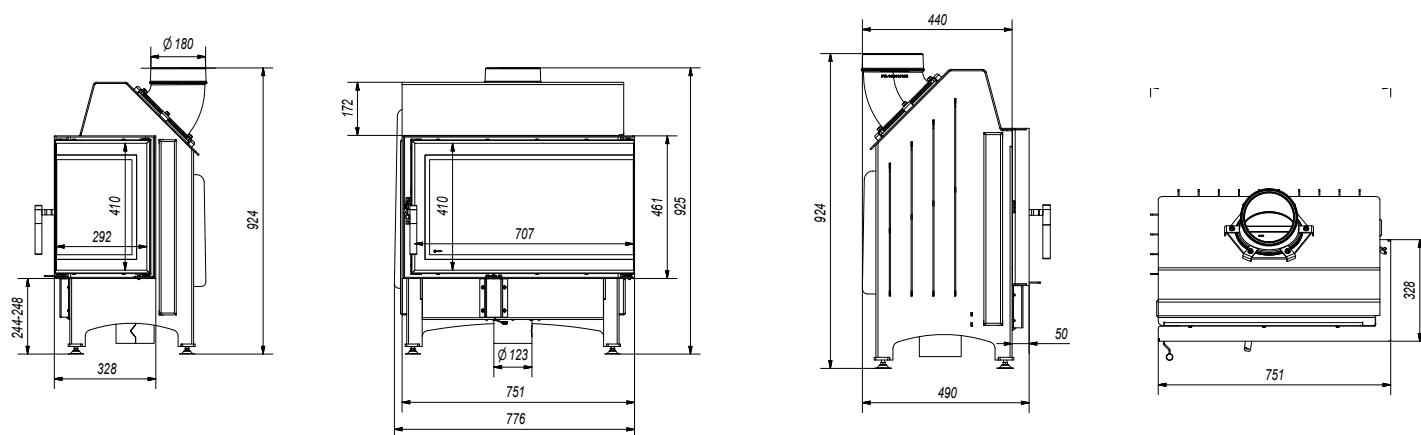

DIMENSIONS MAJA G

